


Mask E Orange

Professional waterproof adhesive tape, suitable for outdoor masking in very wet conditions. Thanks to its temperature resistance up to 80 °C for 30 minutes, it's excellent for applications in the car body repair sector. Recommended removal within 60 hours. UV resistance up to 7 days.

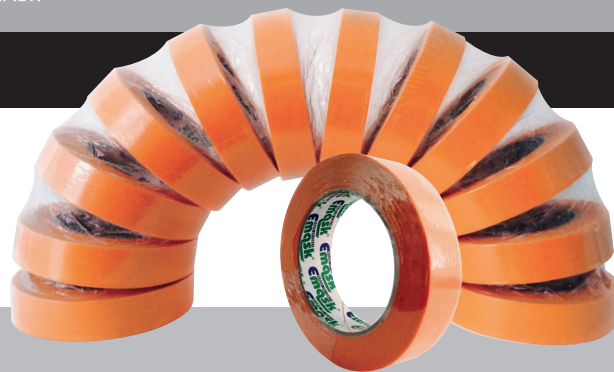

ADVANTAGES AND PERFORMANCES

- Good adhesiveness on irregular surfaces
- Residue-free removal
- Compatible with the most common paints
- Removable without tearing
- Cross-linked adhesive
- UV resistance up to 7 days

TECHNICAL PROPERTIES

		tolerance	test method
Adhesive:	natural rubber and solvent resins		
Total thickness:	130 µm	± 10 %	AFERA 5006
Adhesion to steel:	min. 4,8 N/cm		AFERA 5001
Tensile strength:	min. 90 N/cm		AFERA 5004
Elongation at break:	min. 8 %		AFERA 5004
Temperature resistance:	up to 80 °C for 30 minutes		
Colour:	orange		

The above values are the result of arithmetic averages from tests on sample productions and are not legally binding.

ARTICLES, DIMENSIONS AND BARCODES

	dimensions	pieces per box	barcode
Mask E Orange:	19 mm x 50 m	96 rolls	8051499032784
Mask E Orange:	25 mm x 50 m	72 rolls	8051499032791
Mask E Orange:	30 mm x 50 m	60 rolls	8051499032807
Mask E Orange:	38 mm x 50 m	48 rolls	8051499032814
Mask E Orange:	50 mm x 50 m	36 rolls	8051499032821

OUR PROPOSAL OF PACKAGING

- Sleeve with B/W or coloured (up to 5 colours) barcode label
- Harmonica

RECOMMENDATIONS

It's a good rule to use the product within 6 months from purchase, because the unwinding force of the tape increases with time. The product must be stored in its box in a dry location protected from sunlight, at about 15 °C - 25 °C and 50% relative humidity. If stored in different conditions, the product must be reconditioned. After application, the removal of the tape must be done slowly without tears. Before applying the tape, always check if the surface is clean. Euromask disclaims any liability for any direct or indirect damage coming from the misuse of the product. Under normal conditions, the tape is not toxic and is not approved for medical use.

The a.m. values may be changed at any moment for production needs or technical updates.

rev. 01_May 2019